


/



CAM/

1um

30 /

IO

3 9

24IN/24OUT

G-CODE

PWM

G00-G99

2 CO2/ 5V/24V

EtherCAT/

- -

APP

/

/

EtherCAT

/

/

# EDH-1000



DC24V




0-150Hz



±15V



HMI



RS232/485



/





EtherCAT    TCP/IP/RS485(MODBUS), CAN

0.2mm~20mm

0.001mm

999mm/s

DA

16bit

-10~+10V


4000Hz

0.05mm

2G

60 / @ 6000 1mm 0.6mm

3D

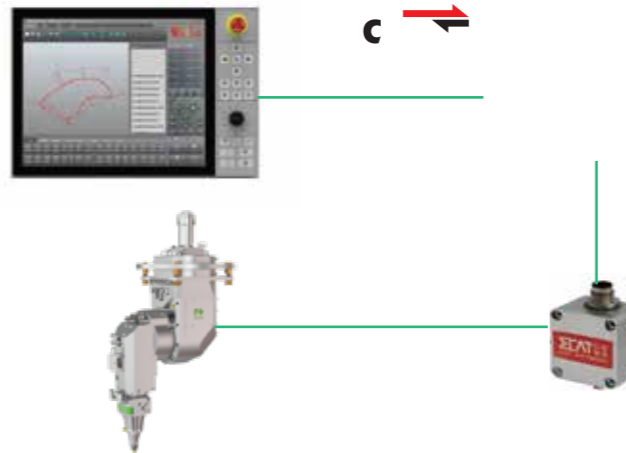

2D

EDS3020

IO

IO

2D/3D/

+ 1MHz

50kHz

28

1 2A

DA

0~+10V 16bit

EtherCAT , 100Mbps

0.2mm-20mm

PWM

1 5V 1 24V 20kHz

23 500mA

75 / @ 6000 1mm 0.6mm



# IO

2D/3D/


0.2mm-20mm

75 / @ 6000 1mm 0.6mm

EtherCAT , 100Mbps

PWM

1 5V/24V可选 20kHz

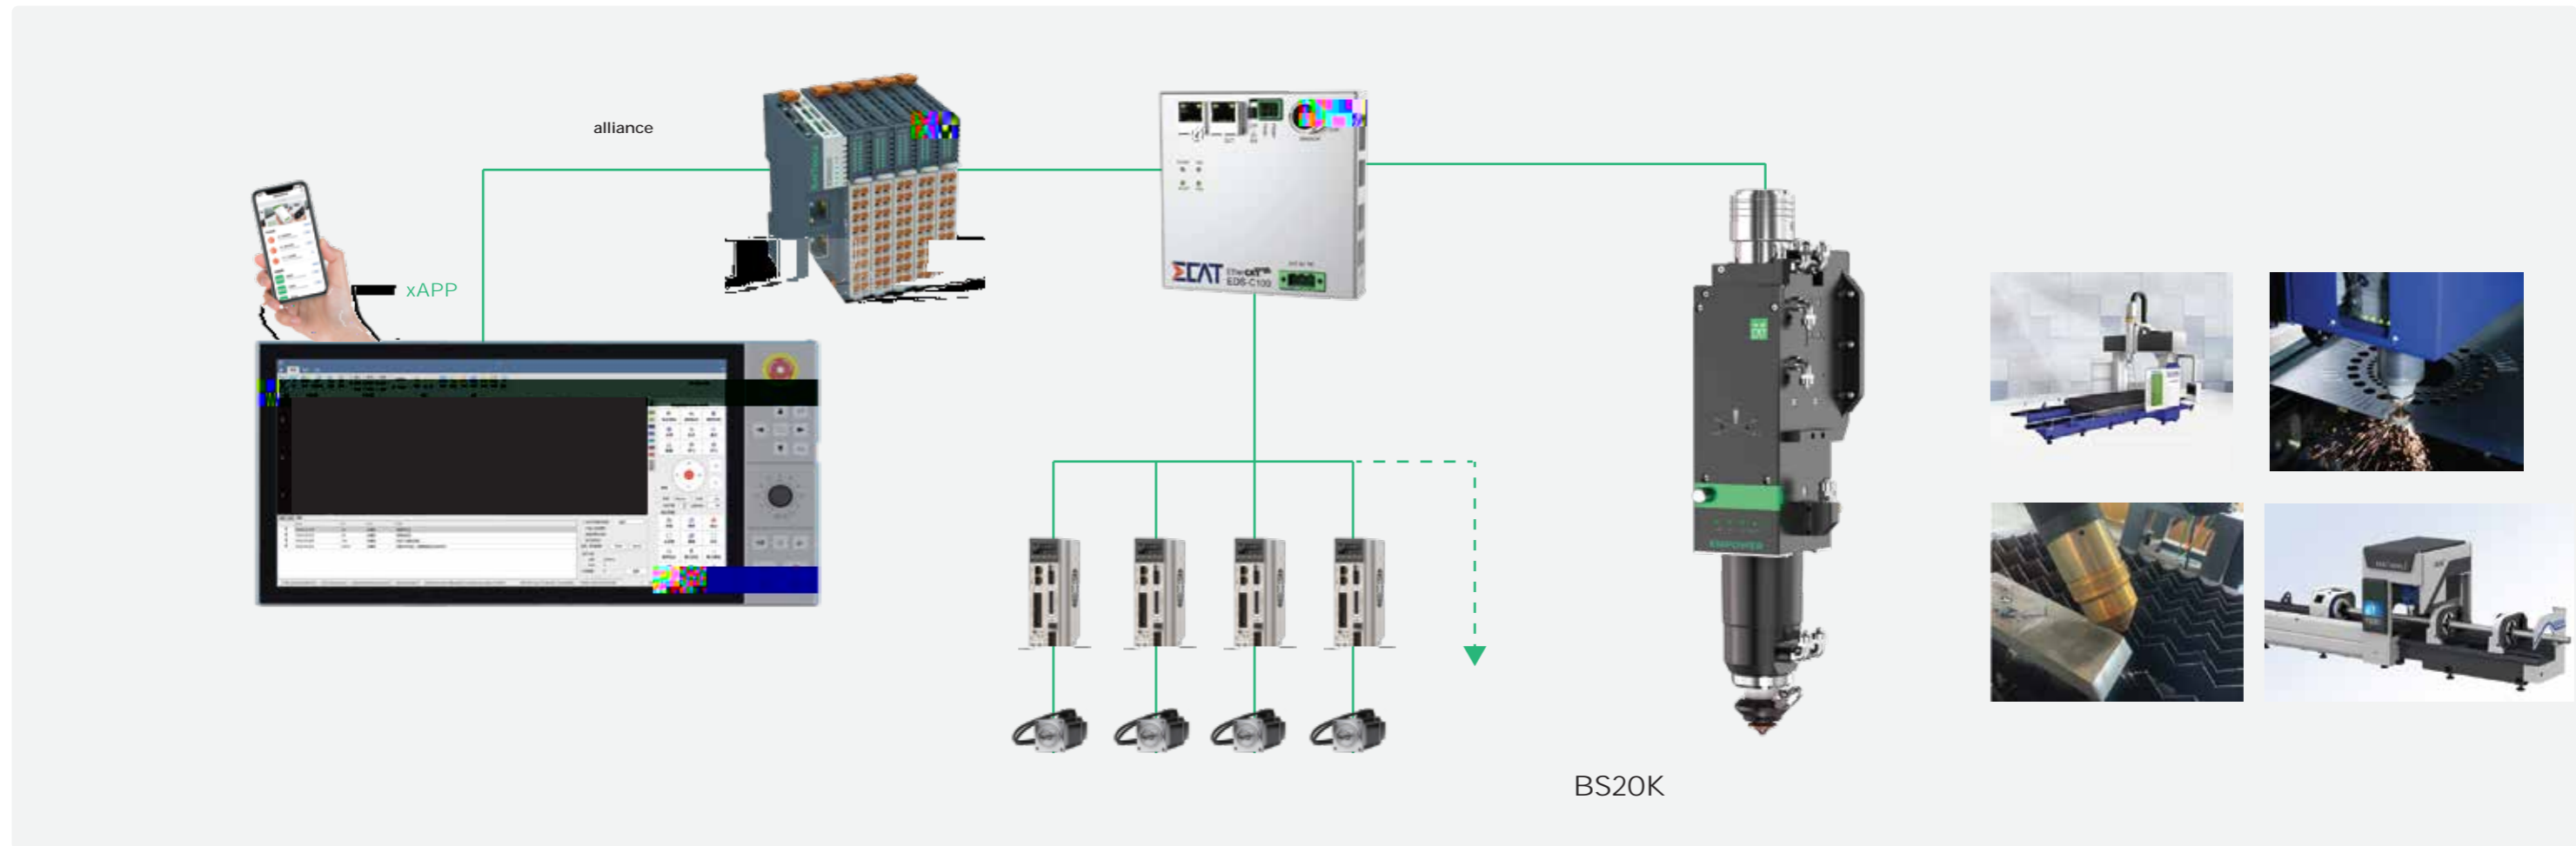

EtherCAT IO

- 
- 
- 
- 
- 

EtherCAT

EtherCAT, 100Mbps

DC24V, 1A

EtherCAT, 100Mbps

8

2500VA/300W

16

# EPN-1000



- 
- 
- EtherCAT EtherCAT
- EtherCAT
- EtherCAT

1

2


E -EtherCAT

EtherCAT, 100Mbps

DC24V, 1A

< 4ms

IO

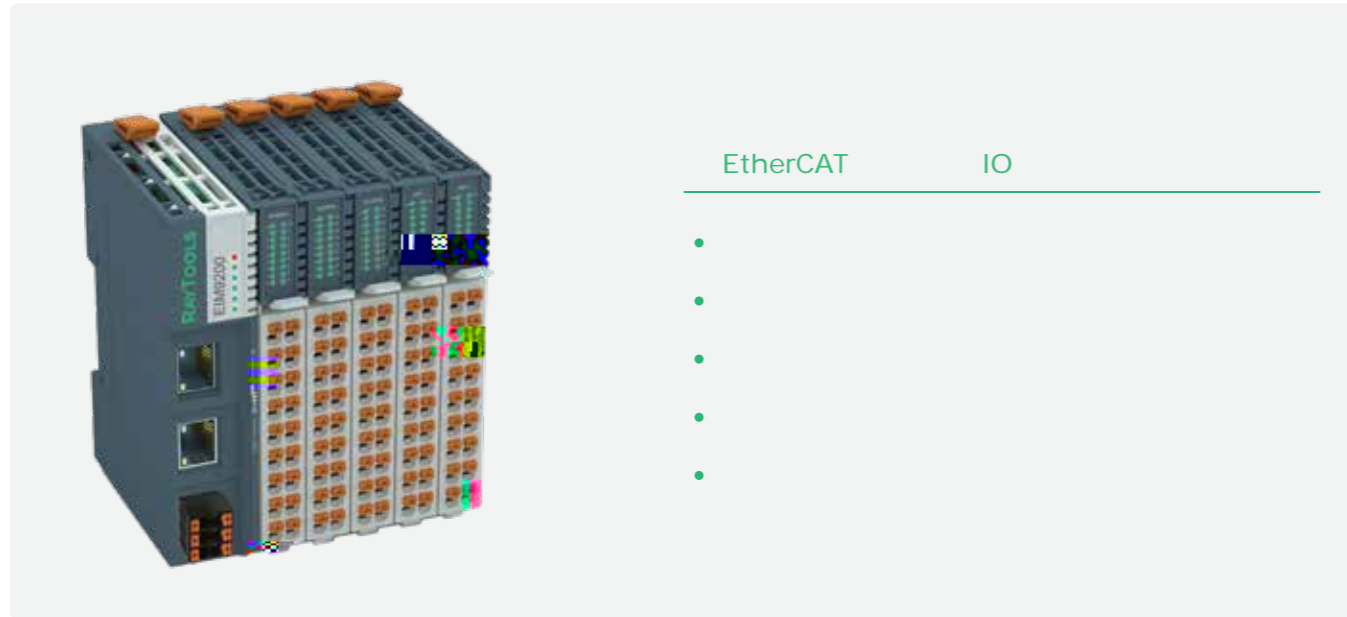

EtherCAT IO

- 
- 
- 
- 
- 

EtherCAT , 100Mbps

EBUS

ADC


4/8 -10~+10V/4~20mA 16bit

DAC

4/8 -10~+10V/4~20mA 16bit

8 4~20ma

20M ABZ/TTL

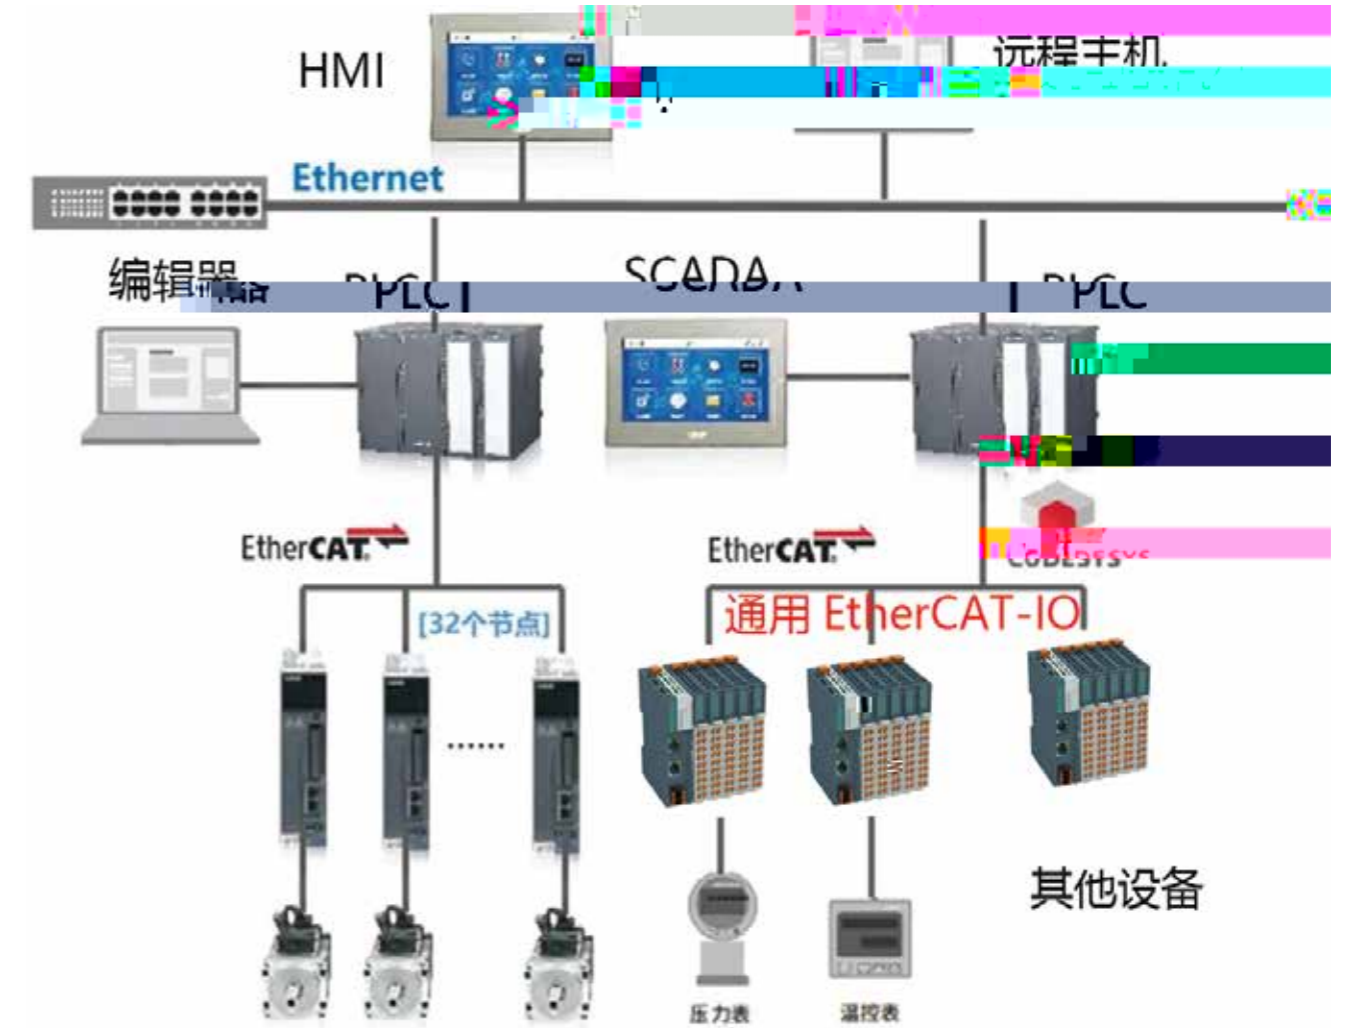

其他设备

3C





